




PARA 500 X 250 & 500 X 500



DESCRIPTION: Slab TEXTURE: HD² Smooth

SLABS

PALLET OVERVIEW 500 X 250



PALLET OVERVIEW 500 X 500



NOTES


Pedestal Set Application:

Para 500x500 can be used with pedestals at each corner (pedestrian use only). Allowable load Capacity of slab on pedestal set (including a safety factor of 2): 1 300 lb (590 kg)

See page 26 to 28 for more technical information.

See page 20 for more information about applications.

*For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.

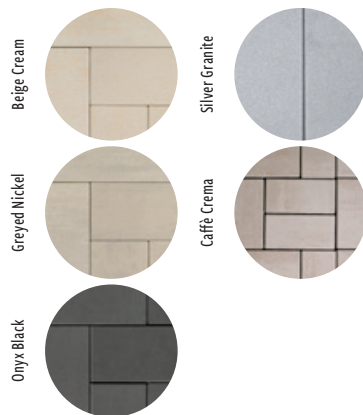

Specifications per pallet	Imperial	Metric
Cubing	118.40 ft²	11 m ²
Approx. Weight	3 422 lbs	1 552 kg
Number of rows	11	
Coverage per row	10.76 ft ²	1 m ²
	Length 6.56 lin. ft	2 lin. m
	Depth 13.12 lin. ft	4 lin. m


Unit dimensions	in	mm	Units/pallet
Height	2 3/8	60	88 units
Width	19 11/16	500	
Length	9 13/16	250	

Specifications per pallet	Imperial	Metric
Cubing	118.40 ft²	11 m ²
Approx. Weight	3 403 lb	1 544 kg
Number of rows	11	
Coverage per row	10.76 ft ²	1 m ²
Linear coverage per row	6.56 lin. ft	2 lin. m

Unit dimensions	in	mm	Units/pallet
Height	2 3/8	60	44 units
Width	19 11/16	500	
Length	19 11/16	500	


01 | Linear pattern

100% - 500x250




02 | Linear pattern

100% - 500x250




04 | Herringbone pattern

100% - 500x250




11 | Linear pattern

50% 500x750 | 50% 500x500




13 | Modular pattern

50% 500x500 | 25% 500x250 | 25% 500x750



14 | Herringbone pattern

50% 500x750 | 32% 500x500 | 18% 500x250




Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.



PARA 500 X 750

DESCRIPTION: Slab **TEXTURE:** HD² Smooth

PALLET OVERVIEW



Specifications per pallet	Imperial	Metric
Cubing	88.80 ft²	8.25 m ²
Approx. Weight	2 537 lbs	1 151 kg
Number of rows	11	
Coverage per row	8.07 ft ²	0.75 m ²
Length	4.92 lin. ft	1.50 lin. m
Depth	3.28 lin. ft	1 lin. m



NOTES

See page 26 to 28 for more technical information.

See page 20 for more information about applications.


Allowable load Capacity of slab on pedestal set (including a safety factor of 2): 1135 lb (514 kg)

Unit dimensions	in		mm		Units/pallet
	in	mm	in	mm	
Height	2 3/8	60			22 units
Width	19 11/16	500			
Length	29 1/2	750			




06 | Linear pattern

100% - 500x750




07 | Linear pattern

100% - 500x750




08 | Linear pattern

100% - 500x750




09 | Herringbone pattern

100% - 500x750



10 | Linear pattern

75% 500x750 | 25% 500x250



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Beige Cream

Greyed Nickel

Onyx Black

Silver Granite

Caffè Crema

